

# Data sheet

02.09.2022 MADE WITH VEM EKAT 2022



## Manufacturer

VEM motors GmbH - Werk Zwickau  
Äußere Dresdner Str. 35

08066 ZWICKAU  
Deutschland

## Customer

### Three-phase motors with squirrel cage rotor, Housing grey cast iron

Type	IE3-W41R 90 LY2
Design output	( kW ) 2,2
Design torque	( Nm ) 7,29
Class IE	[ - ] IE3-85,9%
Efficiency determination	EN 60034-2-1
Duty type	S1
Design frequency	( Hz ) 50
Design speed	[rpm] 2880
Voltage	( V ) 230/400
Connection	[ - ] D Y
Current	[ A ] 7.39 4.25
Relative pull-in current	[ - ] 8
Relative starting torque	[ - ] 2,5
Relative pull-up torque	[ - ] 2,3
Relative pull-out torque	[ - ] 2,9
Efficiency 100/75/50 %	[ % ] 85,9 / 85,7 / 83,9
Power factor	[ - ] 0,88
Th. cl.	155(F/B)
Coolant temperature	( °C ) -20°C...+40°C
Altitude above sea level	( m ) 1000m
Degree of protection IP	IP55
Moment of inertia	( kgm² ) 0,00275
Motor weight	( kg ) 23,5
Bearing, D-side	6205 2Z C3
Bearing, N-side	6205 2Z C3
Relubrication interval	( h )
Grease type	Asonic GLY 32
Grease amount	[cm³]
A-sound pressure level	( dB ) a.A.

### Options

Type of mounting	IM B35
Flange	FF 165[A 200]
Terminal box	Standard
Position of terminal box	on the top
Cable gland	Sealing plug
Position of cable entry	right
Shaft	Standard, 1 shaftend
Bearing	Easy bearing arrangement
Limit values to vibration velocity	Class A
Colour system	Balancing with half key
Delivery conditions and/or official regulations:	07 chemical industries (KKC3), RAL 1013 pearl white IEC / EN 60034-1

This document was produced electronically, all specifications are valid only after confirmation of the manufacturer

# Data sheet


02.09.2022 MADE WITH VEM EKAT 2022



Three-phase motors with squirrel cage rotor,  
Housing grey cast iron

## IE3-W41R 90 LY2

### Mounting position



Type of mounting: IM B35

Flange: FF 165[A 200]



Position of terminal box: on the top

Brake type:

Forced-ventilation:

Terminal box: KA 05

Cable gland O: 1 xSealing plug

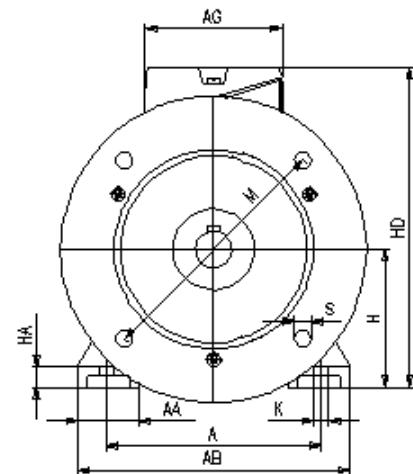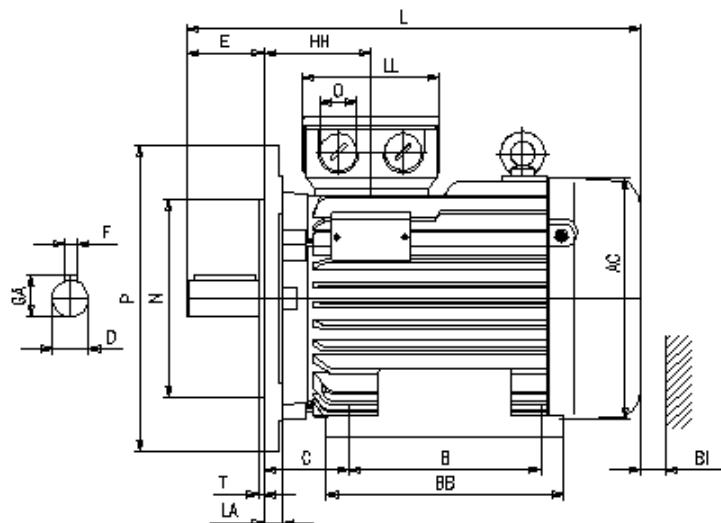

### Motor

A 140	AA 40	AB 178	AC 177	AD -	B 125	B' -	BA -	BA' -	BB 155	C 95	CA -	K 10	K' 10
L 360	LC -	H 90	HA 10,5	HD 217	HH 153	BI 18			Protection cover L	AG 92	LL 92	BE -	AH -

### Flange

P 200	N 130	LA 10	M 165	T 3,5	S 11								
----------	----------	----------	----------	----------	---------	--	--	--	--	--	--	--	--

### Tolerances

H -0,5	N j6	D k6	DA k6
-----------	---------	---------	----------

### Shaft-DS

D 24	E 50	GA 27	F 8	DB DIN 332 DS - M8
---------	---------	----------	--------	-----------------------

### Shaft-NS

DA -	EA -	GC -	FA -
---------	---------	---------	---------

### DB...Centre hole

Delivery conditions and/or official regulations: IEC / EN 60034-1

This document was produced electronically, all specifications are valid only after confirmation of the manufacturer