

# Data sheet

16.03.2022 MADE WITH VEM EKAT 2021



## Manufacturer

VEM motors GmbH - Werk Wernigerode  
Carl-Friedrich-Gauß-Straße 1

38855 WERNIGEROODE  
Deutschland

## Customer

### Three-phase motors with squirrel cage rotor, Housing grey cast iron

Type	IE3-W43R 315 MX4 KV TPM NS LL IL HW		
Design output	( kW )	160	
Design torque	( Nm )	1028	
Class IE	[ - ]	IE3-95,9%	
Efficiency determination		EN 60034-2-1	
Duty type		S1	
Design frequency	( Hz )	50	
Design speed	[rpm]	1485	
Voltage	( V )	400/690	
Connection	[ - ]	D	Y
Current	[ A ]	294,0	170,4
Relative pull-in current	[ - ]	8,2	
Relative starting torque	[ - ]	1,8	
Relative pull-up torque	[ - ]	1,6	
Relative pull-out torque	[ - ]	2,5	
Efficiency 100/75/50 %	[ % ]	95,9 / 96,1 / 95,8	
Power factor	[ - ]	0,82	
Th. cl.		180(H)	
Coolant temperature	( °C )	-20°C...+40°C	
Altitude above sea level	( m )	1000m	
Degree of protection IP		IP55	
Moment of inertia	( kgm² )	2,27	
Motor weight	( kg )	850	
Bearing, D-side		6317 C3	
Bearing, N-side		6316 MC3 VL0241	
Relubrication interval	( h )	4000	
Grease type		BERUTOX FH 28KN	
Grease amount	[cm³]	57/52	
A-sound pressure level	( dB )	70	

### Options

Type of mounting	IM B35
Flange	FF 600[A 660]
Terminal box	Standard
Position of terminal box	on the top
Cable gland	EMV M 63x1,5 MS
Position of cable entry	right
Shaft	Standard, 1 shaftend
Bearing	Relubrication device, easybearing arrangement
Special details to bearings	Fixed bearing, N-side
Winding protection	Insulated bearing, N-side
Limit values to vibration velocity	1 set ptc resistors
Colour system	Class A
Delivery conditions and/or official regulations:	Balancing with half key 01 Moderate (KK C2), RAL 7031 blue-grey IEC / EN 60034-1

This document was produced electronically, all specifications are valid only after confirmation of the manufacturer

# Data sheet


16.03.2022 MADE WITH VEM EKAT 2021



Three-phase motors with squirrel cage rotor,  
Housing grey cast iron

**IE3-W43R 315 MX4 KV TPM NS LL IL HW**

## Mounting position



Type of mounting: IM B35

Flange: FF 600[A 660]



Position of terminal box: on the top

Brake type:

Forced-ventilation:

Terminal box: KK 200 A

Cable gland O: 2 xEMV M 63x1,5 MS

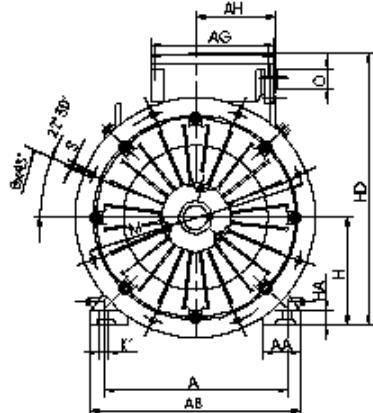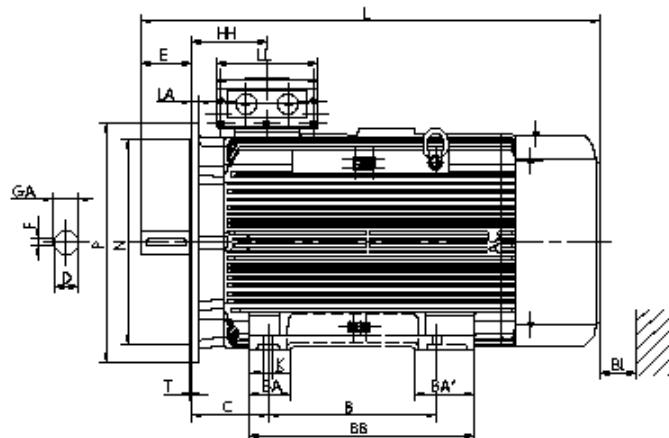

## Motor

A 508	AA 126	AB 590	AC 550	AD -	B 457	B' -	BA -	BA' 150	BB 554	C 216	CA -	K 28	K' 35
L 1135	LC -	H 315	HA 44	HD 731	HH 211	BI 100		L -	AG 282	LL 242	BE 242	AH -	

## Flange

P 660	N 550	LA 22	M 600	T 6	S 22	Tolerances	H -1	N h6	D m6	DA m6
----------	----------	----------	----------	--------	---------	------------	---------	---------	---------	----------

## Shaft-DS

D 80	E 170	GA 85	F 22	DB DIN 332 DS- M20	Shaft-NS	DA -	EA -	GC -	FA -
---------	----------	----------	---------	-----------------------	----------	---------	---------	---------	---------

## DB...Centre hole

Delivery conditions and/or official regulations: IEC / EN 60034-1

This document was produced electronically, all specifications are valid only after confirmation of the manufacturer